MBM **352S**

High speed, air feed folder ideally suited for high-volume digital production.

Speed, sheets per hour	30,000*
Paper size, inches	3 3/8 x 4 3/4 to 12 5/8 x 17 3/4
Paper weight, pounds	13-110*
Sheet capacity	450*

*May vary due to variations in paper.



Air suction feed system, suitable for coated stocks. Adjusts in seconds for standard and custom folds. Variable speed control. Powered exit conveyor. Bottom-feed, top-loading design for continuous reloading and dependable sheet separation. Polyurethane foam rollers eliminate the need for fold roller pressure settings. Turbine blower fully enclosed for quiet operation. 2 fold plates. Heavy-duty, non-flexing side frames. Needle bearings for high speed production. Mounted on casters. Optional extended delivery system, crossfold for right-angle folding, and slitting, scoring, and perforating attachments.

Specifications	
Electrical requirements	115 V, 60 Hz
Dimensions (D x W x H), inches	22 1/4 x 51 1/4 x 43 1/2
Shipping weight, pounds	312

JaMarK & Associates, LLC
PO Box 722
Cedarburg, WI 53012
262-375-4368
www.Jamarkllc.com

WWW.MBMCORP.COM
TEL: 800-223-2508

WWW.IDEAL-MBM.COM
TEL: 800-387-2528

MBM CORPORATION | IDEAL.MBM CORPORATION

All technical data is approximate and subject to change. © MBM Corporation, 7/2014.

MBM **352S**

Features

ENCLOSED TURBINE BLOWER
The low-maintenance blower does not require filter changes.

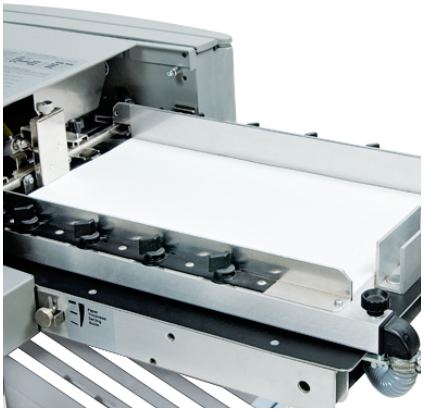

TOP-LOADING PAPER FEED
A top-loading paper feed system allows continuous operation.

c UL us
I.T.E. Listed 802 D

MBM CORPORATION | IDEAL.MBM CORPORATION

All technical data is approximate and subject to change. © MBM Corporation, 7/2014.