


# PAITEC ES8000

Tabletop pressure sealer featuring up to 700 pressure seal forms to minimize reloadings.

## Specifications

<b>Speed, forms per hour</b>	8,000
<b>Form sizes, inches</b>	Up to 14 depth, up to 9 width
<b>Paper weights, pounds</b>	20-28
<b>Feeder capacity</b>	700 pressure seal forms
<b>Dimensions (W x L x H)</b>	17 x 24 x 15
<b>Weight, pounds</b>	115
<b>Electrical requirement</b>	110v AC

## Fold setting:




Large capacity elevator infeed table holds 700 pressure seal forms. Processes up to 8,000 forms per hour. User friendly operator panel. Multi-sensor monitoring system. Built-in 350 sheet catch tray. Quick set manual fold setting. Optional inline kit to select printers for easy printer interface. Automatically detects double feeds.

## Features




### EASY USER INTERFACE

Includes auto stop and auto re-start function, electronic thickness detection, and batch counter.

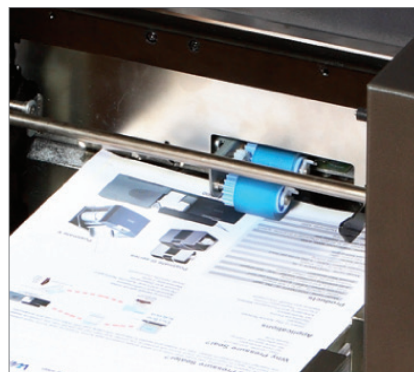

### REVERSE FRICTION ROLLER

Automatically detects, singulates, and corrects doubles without operator intervention for increased productivity.

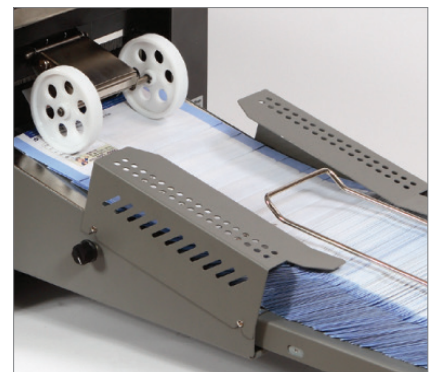

### OPTIONAL CONVEYOR OR VERTICAL STACKER

Optional auto-extending conveyor or vertical stacker can hold up to 650 processed forms.



JaMarK & Associates, LLC

262-375-4368

[www.Jamarkllc.com](http://www.Jamarkllc.com)

All technical data is approximate and subject to change. © MBM Corporation, 09/2014.

