

### Standard Features:

- **Drop-In Feed System:** A drop-in three roller feed system produces dependable feeding of forms with no paper fanning required
- **Hopper Capacity:** Up to 350 forms
- **Fold Plates:** Easy to adjust and fine tune
- **Six-Digit Resettable Counter:** Provides maximum audit control
- **Paper Jog Control:** Allows operators to jog forms through before operation
- **14" Form Length Capability:** Flexibility to process even and uneven panel forms up to 14" in length
- **Desktop Design:** A sleek desktop design made with office usage in mind
- **LED Indicators:** Notifies the operator when the power is on, a cover is open, the paper runs out and if a fault occurs
- **Noise Reduction:** Top and side covers are insulated to reduce operating noise
- **Fold Types:** C, Z, V, uneven C and Z, custom folds

### Options:

- **P2032:** Cost saving package that includes the FD 2032, 18" conveyor and cabinet
- **18" Conveyor w/ Photo Eye:** Allows for neat and sequential stacking
- **Locking Cabinet:** Fully enclosed for storage
- **402 Series Jogger:** Reduces static electricity and aligns forms for proper feeding
- **FD 2000-35 Reverse Stacking Conveyor:** Allows for A-to-Z input and A-to-Z output



Shown with optional 18" conveyor

The FD 2032 AutoSeal® desktop pressure sealer provides a reliable and compact solution for processing pressure sensitive self-mailers. Up to 350 forms can be loaded in the hopper and processed at speeds up to 11,000 forms per hour.

Standard features include a six-digit counter, jog control, fault detection, LED indicators and an operator friendly touch-pad control panel. Its redesigned sliding fold plates make setup and operation even easier, with fine tuning knobs for precision folds.

All of these features make the FD 2032 the perfect solution for streamlining your high-volume post processing. The FD 2032 also has an optional fully enclosed cabinet for storage, and a choice of two conveyors with photo-eye for neat and sequential stacking of processed forms.

Formax - New Hampshire, USA  
[www.formax.com](http://www.formax.com)


Local Dealer:

JaMarK & Associates, LLC  
PO Box 722  
Cedarburg, WI 53012  
262-375-4368  
[www.Jamarkllc.com](http://www.Jamarkllc.com)

**Visit [www.formax.com](http://www.formax.com) to watch the product demonstration video**

## Flexible


The FD 2032 handles a variety of documents up to 8 1/2" x 14" including checks, invoices, school reports, tax forms and appointment notices. Pressure sensitive self-mailers can be used for virtually any application that can be printed on one form.

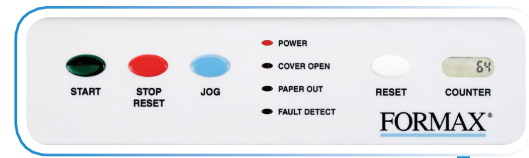

User-friendly Control Panel

## Pressure Seal Solution

The AutoSeal® FD 2032, combined with a laser printer and pressure seal forms, creates a secure, time saving and efficient solution for paper processing.



Standard "Z" Fold Process

## Dependable & Powerful

The FD 2032 processes forms at a rate of up to 11,000 sheets per hour and can hold up to 350 - 24# forms in the feed hopper. This makes the FD 2032 an economical and reliable solution for high-volume processing in a compact tabletop model.




Standard Catch Tray

## Easy to Operate

The FD 2032 is designed for user-friendly operation. Simply set your folds according to the clearly marked settings on the fold plates, load your forms, press start and you're on your way. The FD 2032 has LED indicators for power on, fault detection, paper out and cover open. It also includes a six-digit counter for audit control.

## Specifications:

Hopper Capacity:	Up to 350 sheets 24# (90gsm)
Fixed Speed:	Up to 11,000 sheets per hour - based on 11" (279mm) "Z" fold
Paper Size:	Up to 8.5" W x 14" L (216 W x 356 L mm)
Usage:	High-volume tabletop
Power:	FD Model: 120 Volts AC 50/60Hz FE Model: 220 Volts AC 50/60Hz
Dimensions:	25.75" L x 16.5" W x 14.25" H (65 L x 42 W x 36 H cm)
W/ 18" Conveyor & Cabinet:	46" L x 22" W x 44" H (117 L x 56 W x 112 H cm)
Weight:	88.5 lbs (40 kg)
Document Sequence:	Standard sequence is A-to-Z input, Z-to-A output. Optional FD 2000-35 reverse conveyor available for A-to-Z output.
Certifications:	UL and CUL approved CE applied for
Made in the USA	

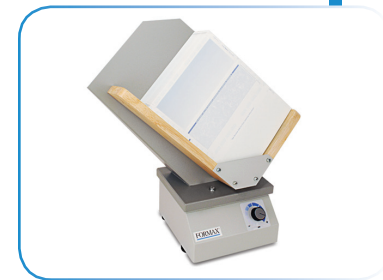

402 Series Jogger - an option which reduces static electricity from forms and aligns them for proper feeding